

**Blustyle**  
by COTTO D'ESTE

**CONCRETE JUNGLE**  
ENJOY THE CITY





**Blustyle**<sup>®</sup> | BELLA  
PER  
SEMPRE  
by COTTO D'ESTE



**CONCRETE JUNGLE**  
ENJOY THE CITY



ATELIER·25

FACTORY·56


STORE·18

PUB·49

NATURAL

HONED

GRIP

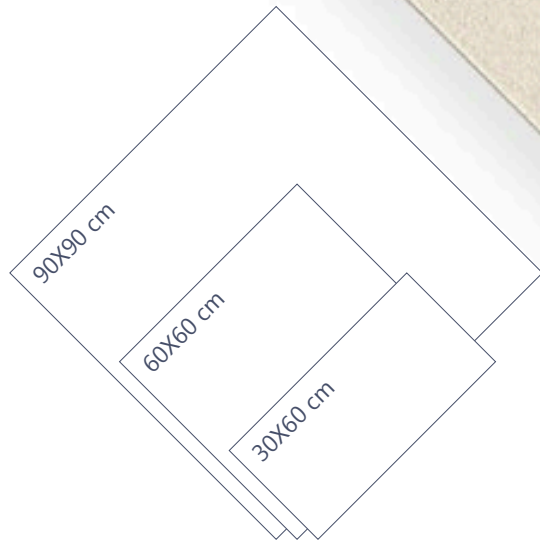









ATELIER-25 Natural  
cm 90X90



ATELIER-25 Honed  
cm 60X60







FACTORY-56 Natural  
cm 60X60



FACTORY-56 Honed  
cm 60X60











FACTORY-56 Grip  
cm 60X60



STORE-18 Grip  
cm 60X60











STORE-18 Honed  
cm 90X90



STORE-18 Natural  
cm 90X90







STORE-18 Natural  
cm 90X90







PUB-49 Honed  
cm 60X60



PUB-49 Natural  
cm 60X60





TABELLE CALIBRI  
SIZES TABLE

90x90 RETT.	
CALIBRO CALIBRE	W*(mm)
O	901x901
P	898x898
Q	895x895

60x60 RETT.	
CALIBRO CALIBRE	W*(mm)
O	600x600
P	598x598
Q	596x596
R	595x595

30x30 RETT.	
CALIBRO CALIBRE	W*(mm)
O	299x600
P	298x598
Q	297x596
R	296x595

60x60 STD	
CALIBRO CALIBRE	W*(mm)
I	600,8x600,8
Q	603,2x603,2
T	605,6x605,6
U	608,0x608,0
V	610,4x610,4

CARATTERISTICHE TECNICHE  
TECHNICAL FEATURES

RESISTENZA ALLO SCIVOLAMENTO  
SLIPPERING RESISTANCE

DIN 51130	R11 GRIP - R10 NATURAL - R9 HONED
DIN 51097	C (A+B+C) GRIP - B (A+B) NATURAL
BCR TORTUS	$\mu > 0,40$
ANSI A326.3	DCOF $\geq 0.42$
AS/NZS 4586	P4 GRIP
UNE ENV 12633	Clase 3 GRIP - Clase 2 NATURAL

CARRABILITÀ - Valore medio  
TRANSITABILITY - Average value

EN 1339	T11-U11 * GRIP
---------	----------------

CARICO DI ROTTURA (S) - Valore medio  
BREAKING STRENGTH (S) - Average value

ISO 10545-4	13.600 N 20mm - 3.000 N 11mm - 2.500 N 10mm
ASTM C 648	2.800 lbf 20mm - 700 lbf 11mm - 600 lbf 10mm

ASSORBIMENTO D'ACQUA - Valore medio  
WATER ABSORPTION - Average value

ISO 10545-3 / ASTM C 373	0,05%
--------------------------	-------

RESISTENZA ALLA FLESSIONE - Valore medio  
MODULUS OF RUPTURE - Average value

ISO 10545-4	50 N/mm <sup>2</sup>
-------------	----------------------

RESISTENZA ALL'ABRASIONE PROFONDA - Valore medio  
DEEP ABRASION RESISTANCE - Average value

ISO 10545-6 / ASTM C 1243	145 mm <sup>3</sup>
---------------------------	---------------------

DILATAZIONE TERMICA LINEARE  
LINEAR THERMAL EXPANSION

ISO 10545-8	$\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$
ASTM C 372	$\alpha \leq 4.4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$

RESISTENZA ALLE MACCHIE  
STAIN RESISTANCE

ISO 10545-14	5 RESISTENTE - 5 RESISTANT
ASTM C 1378	A RESISTANT

RESISTENZA ALL'ATTACCO CHIMICO  
RESISTANCE TO CHEMICAL ETCHING

ISO 10545-13	LA-HA RESISTENTE RESISTANT **
ASTM C 650	A RESISTANT **

RESISTENZA AL GELO  
FROST RESISTANCE

ISO 10545-12 / ASTM C 1026	RESISTENTE - RESISTANT
----------------------------	------------------------

REAZIONE AL FUOCO  
FIRE REACTION

EN 13823	Classe/Class A1 (wall)
EN 9239-1	Classe/Class A1 <sub>n</sub> (floor)

FLAME SPREAD

ASTM E84	Class A
----------	---------

CONDUCIBILITÀ TERMICA  
THERMAL CONDUCTIVITY

EN 12524	$\lambda = 1,3 \text{ W/m } ^\circ\text{K} / 0.7 \text{ BTU/ft h } ^\circ\text{F}$
----------	--

STONALIZZAZIONE  
DESHADING

ANSI A137.1	V3
-------------	----

\*Carrabile quando incollata su massetto. / Transitabile when applied to a screed with adhesive.  
\*\*No acido fluoridrico e derivati. / Not resistant to hydrofluoric acid and derivatives.

PULIBILITÀ  
PULIBILITY

VISIBILITÀ DELLE IMPRONTE - Metodo Blustyle

Questa classificazione specifica il grado di visibilità delle impronte rilasciate sul pavimento dopo il passaggio con scarpe sporche di polvere.

**A** - Impronta non visibile  
**B** - Impronta poco visibile  
**C** - Impronta molto visibile. Ideale per rivestimenti e consigliato per pavimenti solo in ambienti residenziali.

TREAD MARK VISIBILITY - Blustyle method

This classification specifies the visibility degree of the tread marks left on the floor after walking with shoes dirty of dust.

**A** - Tread mark not visible  
**B** - Tread mark not very visible.  
**C** - Tread mark very visible. Ideal for wall installation and recommended for floor installation in residential areas only.

B

FACILITÀ DI PULIZIA - Metodo Blustyle

Il metodo consiste nel classificare il grado di facilità nella rimozione dello sporco generico mediante pulizia manuale con detergente debole.

**Grado 1** - Molto facile, nessuna resistenza dello sporco, rimozione immediata.  
**Grado 2** - Facile, leggera resistenza dello sporco, rimozione veloce.  
**Grado 3** - Meno facile, maggiore resistenza dello sporco, rimozione lenta. Si consiglia detergente forte. Ideale per rivestimenti e consigliato per pavimenti solo in ambienti residenziali.

CLEANING EASINESS - Blustyle method

The method consists in classifying the easiness grade in removing general dirt by manual cleaning with mild detergent.

**Grade 1** - Very easy, no resistance of the dirt, immediate removal.  
**Grade 2** - Easy, light resistance of the dirt, fast removal.  
**Grade 3** - Less easy, higher resistance of the dirt, slow removal. A strong detergent is recommended. Ideal for wall installation and recommended for floor installation in residential areas only.

2

CERTIFICAZIONI  
CERTIFICATIONS



EN 14411

Le DOP sono disponibili sul sito internet www.blustyle.it  
DOP are available on the website www.blustyle.it



Blustyle Ceramica, tramite la holding Panariagroup Industrie Ceramiche S.p.A., è membro dello U.S. Green Building Council del Green Building Council Italia.

Blustyle Ceramica, through Panariagroup Industrie Ceramiche S.p.A. holding, is a member of the U.S. Green Building Council and of the Italian Green Building Council.





# CONCRETE JUNGLE

ENJOY THE CITY

GRES PORCELLANATO / PORCELAIN STONEWARE

Bla UGL - IMPASTO COLORATO/COLORED BODY - Decorazione/Decoration: INKJET - EFFETTO 3D/ INKJET - 3D EFFECT

Conforme/In compliance with: ISO 13006-G (Group Bla), EN 14411-G (Group Bla), ANSI A137.1 (Porcelain tiles - P1 Class)

COLORI / COLOURS



**ATELIER-25**



**FACTORY-56**



**STORE-18**



**PUB-49**

SPESSORI / THICKNESSES

**10 mm - 11 mm (90x90)**

SUPERFICI E FINITURE / SURFACES AND FINISHING

**NATURAL**

Rettificata e rompifilo / Rectified and chamfer

**HONED**

Lappata, rettificata e rompifilo / Honed, rectified and chamfer

**20 mm (eccetto/except PUB-49)**

SUPERFICI E FINITURE / SURFACES AND FINISHING

**GRIP STANDARD**

**GRIP RETTIFICATA**


Rettificata e rompifilo / Rectified and chamfer

FUGA (DIMENSIONE DISTANZIATORE) - JOINT (SPACER SIZE)

**≥2 mm (Rettificata-Rectified) - ≥3 mm (Standard 20mm)**

È compito del posatore controllare sempre il materiale prima della posa. Stendere a terra alcune piastrelle (circa 3 mq.) e verificarne accuratamente le specifiche tecniche ed estetiche d'insieme. The person in charge of installation must check all material before installing it. Place some tiles on the floor (approx. 3 m²) and check the overall technical and aesthetic characteristics with particular care.

FORMATI / SIZES

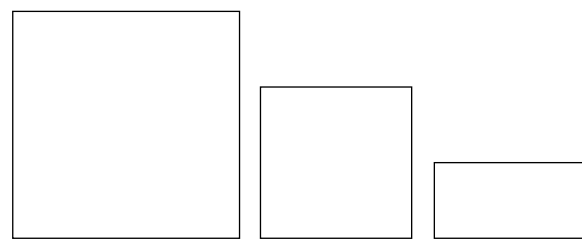

90X90 cm  
36"x36"

60X60 cm  
24"x24"


30X60 cm  
12"x24"

FORMATI / SIZES



60X60 cm  
24"x24"


PEZZI SPECIALI / SPECIAL PIECES

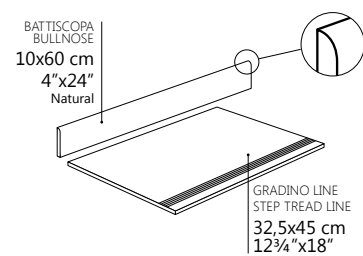

BATTISCOPA  
BULLNOSE  
10x60 cm  
4"x24"  
Natural

GRADINO LINE  
STEP TREAD LINE  
32,5x45 cm  
12¾"x18"

PEZZI SPECIALI / SPECIAL PIECES

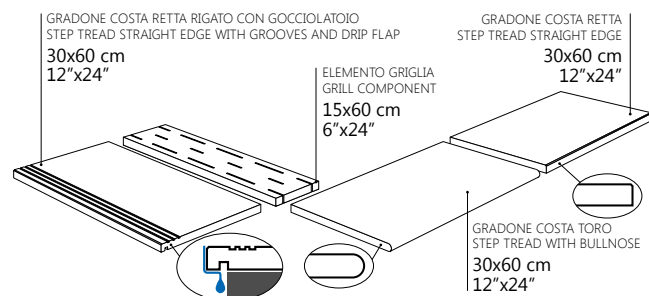

GRADONE COSTA RETTA RIGATO CON GOCCIOLATOIO  
STEP TREAD STRAIGHT EDGE WITH GROOVES AND DRIP FLAP  
30x60 cm  
12"x24"

ELEMENTO GRIGLIA  
GRILL COMPONENT  
15x60 cm  
6"x24"

GRADONE COSTA RETTA  
STEP TREAD STRAIGHT EDGE  
30x60 cm  
12"x24"

GRADONE COSTA TORO  
STEP TREAD WITH BULLNOSE  
30x60 cm  
12"x24"

GARANZIA / WARRANTY



MADE IN ITALY

**20 ANNI** RESIDENZIALE E PUBBLICO / **20 YEARS** RESIDENTIAL AND PUBLIC

**Blustyle**  
by COTTO D'ESTE

BELLA  
PER  
SEMPRE



**Blustyle**<sup>®</sup> | BELLA  
by COTTO D'ESTE | PER  
SEMPRE

Via Emilia Romagna, 31 - 41049 Sassuolo (MO) Italy  
ph. +39 0536 814911 - fax +39 0536 814921  
blustyle.it - info@blustyle.it

PANARIAGROUP INDUSTRIE CERAMICHE S.p.A.